




PCT/GB 2003 / 0 0 2 2 2 8



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

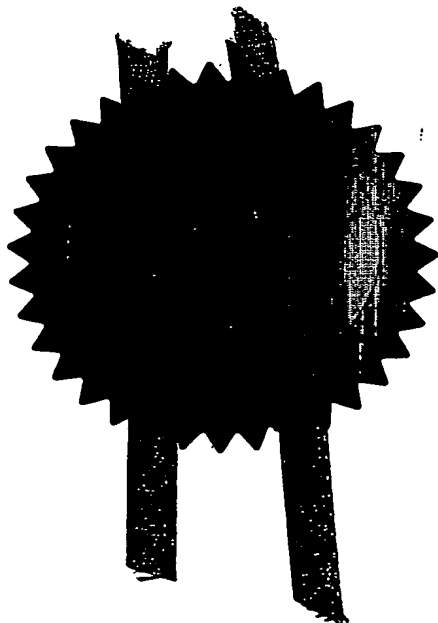


Signed

Dated 3 June 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)

The
Patent
Office



1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	LPT0233		
2.	Patent application number (The Patent Office will fill in this part)	23 MAY 2002		0211893.3
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	Sarah Gredley 90 The Avenue London NW6 7NN		
Patents ADP number (if you know it)		08389751001		
If the applicant is a corporate body, give the country/state of its incorporation				
4.	Title of the invention	PICTURE FRAME		
5.	Name of your agent (if you have one)	Barker Brettell		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)		138 Hagley Road Edgbaston Birmingham B16 9PW		
Patents ADP number (if you know it)		7442494002		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day/month/year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	No		

23MAY02 E720907-2 D02806
P01/7700 0.00-0211893.3

Patents Form 1/77

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 8 + 8 ✓

Claim(s) -

Abstract -

Drawing(s) 2 + 2 only ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) -

Request for preliminary examination -
(*Patents Form 9/77*)

Request for substantive examination -
(*Patents Form 10/77*)

Any other documents -
(*please specify*)

11. I/Wc request the grant of a patent on the basis of this application.

Signature

Barker Brettell
Barker Brettell

Date

23.05.2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Ms. Lucy P. Trueman

Tel: 0121 456 1364

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

PICTURE FRAME

The present invention relates to framing and hanging pictures.

5 It is well known to frame pictures, including prints, posters and photos, to improve the aesthetics of the picture and to provide means by which the picture may be hung on a wall. However, many of the frames currently available are relatively expensive due to the precise work involved in producing a suitably shaped frame. Further, in order to
10 provide support for the picture to enable it to be hung on a wall, frames are generally produced from rigid materials such as wood and metal, and accordingly storage and transportation of frames is limited by the fixed shape of the frame. This affects not only the frame itself as originally produced but also the framed picture if it is later desired to transport the
15 framed picture.

Accordingly, there is a need for a picture framing and hanging system which is relatively inexpensive and easy to transport.

20 According to a first embodiment, the present invention provides an apparatus for framing and/or hanging pictures which comprises one or more framing portions, wherein the or each framing portion is made from a flexible material and is adapted so as to have a first position in which it can be freely moved from a substantially flat conformation to other
25 conformations and a second position in which it is secured in the shape of a three-dimensional shape.

In the first position, the or each framing portion can easily be stored and transported. As the framing portion is made from flexible material, it can
30 easily be bent, rolled or folded as required to enable ease of storage or transportation.

In the second, secured position, the or each framing portion has a fixed shape which is three-dimensional. This provides the or each framing portion with a degree of rigidity and strength that results in the or each framing portion being able to provide sufficient support for a picture in order to enable it to be hung on a wall.

Preferably, the apparatus comprises one, two or four framing portions. When one framing portion is provided, it should be of a size such that in use it can be placed along the top edge of the picture. Preferably it is of a size such that in use it runs along all or substantially all of the length of the top edge of the picture.

When two framing portions are provided, they should be of a suitable size, such that in use one can be placed along the top edge of the picture and the other can be placed along the bottom edge of the picture. Preferably they are of a size such that in use they run along all or substantially all of the length of the top and bottom edge of the picture respectively.

When four framing portions are provided, they should be of a size such that in use one can be placed along the top edge of the picture, one can be placed along the bottom edge of the picture, one can be placed along the left hand edge of the picture and one can be placed along the right hand edge of the picture. Preferably they are of a size such that in use they run along all or substantially all of the length of the top, bottom, the left hand and the right hand edge of the picture respectively. Preferably in the second position an end portion of each framing portion meets, and is most preferably secured to, an adjacent end portion of the adjacent framing portion. This assists in providing the apparatus with suitable strength and rigidity to support a picture when hung on the wall as well as increasing the aesthetics of the apparatus.

It is preferred that one or more of the framing portions is provided with suitable means such that it may be hung from a wall. For example, one or more holes or other such recesses may be provided. This allows the framing portion to be hung from a wall by means of picture hooks, nails, screws or the like protruding from the wall. Clearly such holes or recesses should be located along the length of the framing portion such that when they are used to hang the framing portion from a wall the framing portion hangs straight. For example, one hole may be provided at the centre of the length of the framing portion or two holes may be provided equidistant from the centre of the length of the framing portion. Any other suitable means as known in the art for hanging frames from walls may also be used.

Preferably, the framing portion is provided with securing means for securing the portion in its second, secured position in the shape of a three-dimensional shape. Preferably, releasable securing means are used. Releasable securing means as known in the art may suitably be used, for example the framing portion may be provided with a flap and corresponding slit system. Any suitably shaped and sized flaps may be used; the flaps may be, for example, semi circular, triangular or rectangular. The framing portion could alternatively be suitably provided with corresponding sets of male and female components such as press studs that may be releasably secured together. Preferably, the securing means are spaced regularly along the length of the framing portion.

Preferably, the or each framing portion is of a shape such that when in its second, secured position it is in the shape of a regular three-dimensional shape. For example, the or each framing portion may be a triangular prism, circular prism or rectangular prism shape when in its second, secured position. When there is more than one framing portion, each framing portion may be the same or different shape in its second, secured

position; preferably they are all of the same shape. The or each framing portion may be provided with score lines to assist the folding of the portion into the three-dimensional shape.

- 5 The or each framing portion may be made of any suitable flexible material. For example, the or each framing portion may be made of a flexible plastics material such as a polypropylene or a flexible material such as cardboard.
- 10 In use, the or each framing portion may be attached directly to the picture which it is framing. Accordingly the apparatus of the first embodiment may further comprise a picture to which the or each framing portion may be attached. Alternatively, the or each framing portion may be attached to a backing portion, with the picture being framed being secured to the
- 15 backing portion. Accordingly, the apparatus of the first embodiment may further comprise a backing portion, for example a piece of cardboard or paper, to which the or each framing portion may be attached.

The or each framing portion may be attached to the picture or to the

20 backing portion by any suitable means, for example by means of adhesive. The or each framing portion of the apparatus of the first embodiment may therefore be provided with attaching means, for example a layer of cured or substantially cured adhesive covered with a protective removable layer which can be removed when adhesion is required.

25

- The or each framing portion is attached to the picture or backing portion at the part of the framing portion which in the second, secured position, is the base of the three-dimensional shape. The picture with attached framing portion(s) or the backing portion with attached framing portion(s)
- 30 can easily be stored or transported by placing the or each framing portion into its first, unsecured position. Due to the flexibility of the material of

5

the or each framing portion, the or each framing portion together with any picture or backing portion can be rolled up so as to fit in, for example, a tubular packaging for storage or transportation.

- 5 A packaging means may be provided integrally with the apparatus for framing and/or hanging a picture. The packaging means may be made from a flexible material and is adapted to have a first position in which it can be freely moved from a substantially flat conformation to other conformations and a second position in which it is formed into a package.

10

Preferably the flexible material is one of the materials as described in relation to the framing portions. The packaging means is preferably secured in the second position by any suitable releasable securing means. For example a zip (metal or plastic), male and female connectors or a flap
15 and corresponding slit system.

The package formed is preferably tubular, the flexible material of the packaging means is preferably releasably or permanently secured to the framing portions. The flexible material of the packaging means may in
20 the first position form a backing portion for the framing portion(s), and in a second position form a tubular package around the framing portions for storage and transportation.

- 25 When the picture with attached framing portion(s), or the backing portion with attached framing portion(s) which may have a picture secured thereto, is to be hung on a wall, the or each framing portion is placed into its second, secured position by folding the flexible material of the framing portion into the three-dimensional shape and securing it in this position by means of the securing means provided. If the framing and/or hanging
30 apparatus is integral with a packaging means then the packaging means is

6

placed in the first position before the or each framing portion is placed in the first position.

According to a second embodiment of the present invention, a framed
5 picture is provided which comprises one or more framing portions as
described above attached to one or more edges of a picture. The framed
picture may suitably comprise one framing portion attached to the top
edge of the picture, or two framing portions attached to the top and
bottom edges of the picture respectively, or four framing portions
10 attached to the top, bottom, left hand and right hand edges of the picture
respectively.

The or each framing portion of the framed picture is, in use, in its
second, secured position such that the or each edge of the picture having
15 a framing portion attached is provided with a frame border in the shape of
a three-dimensional shape.

At least one of the framing portions of the framed picture is provided
with means for hanging the picture from a wall as described above.
20 Preferably, at least the framing portion attached to the top edge of the
picture is provided with such hanging means.

Preferably, the framed picture is provided with four framing portions,
such that each edge of the picture is provided with a framing portion.

25

If it is desired to store or transport the framed picture of the second
embodiment, the or each framing portion may be placed in its first,
unsecured position by unsecuring the securing means and unfolding the
portion so that it is in a substantially flat configuration. The framed
30 picture can then be rolled up for easy storage or transportation. Any

packaging means can be secured in its second position as a package for the framed picture.

5 The present invention also provides a method of framing a picture, which method comprises attaching one or more framing portions as described above to a picture, with the or each framing portion being located at an edge of the picture.

10 The present invention will now be described in more detail with reference to the drawings, in which:

Figure 1 is a diagram showing a picture framed using an apparatus according to the present invention, with the framing portions in their first, unsecured position; and

15

Figure 2 is a diagram showing the picture of figure 1 with the framing portions in their second, secured position.

20 Figures 1 and 2 show a picture 1 framed using a framing apparatus comprising four framing portions 2. The framing portions 2 are attached to the edges of the picture 1, with two shorter framing portions 2a being attached to the top and bottom edges of the picture and two longer framing portions 2b being attached to the left hand and right hand edges of the picture. The shorter framing portion 2a attached to the top edge of
25 the picture is provided with a hole at the centre of its length, on the back, to allow the picture 1 to be hung from a wall.

30 The framing portions 2 are provided with semi-circular shaped flaps 3 and corresponding slits 4, and with scored lines 5. When the flaps 3 are not secured in the slits 4, as shown in figure 1, the framing portions 2 are flexible and may be substantially flat or may be bent or rolled.

8

Accordingly, in this first, unsecured, position the framed picture may be rolled up to allow ease of storage or transportation.

When the framing portions 2 are folded along the scored lines 5 and the
5 flaps 3 secured in the slits 4, as shown in figure 2, the framing portions
form rectangular prism shaped frame edges around the picture 1.
Accordingly, in this second, secured, position the framed picture is well
supported and aesthetically pleasing, and may be hung from a wall using
the hole provided in the back of the slot framing portion 2a located along
10 the top edge of the picture 1.

Figure 1

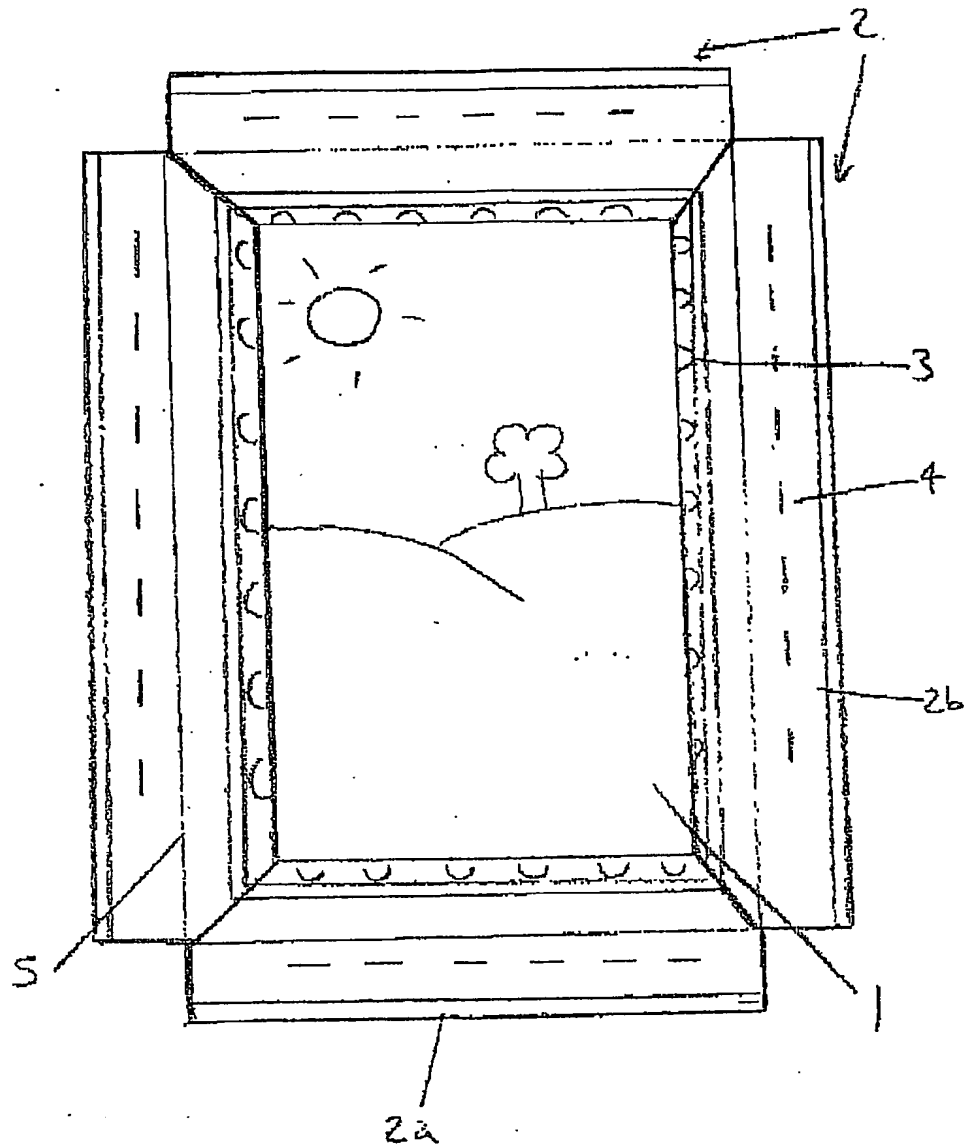


Figure 2

